
## **Trilogy:** Narrow Stile Access Locks



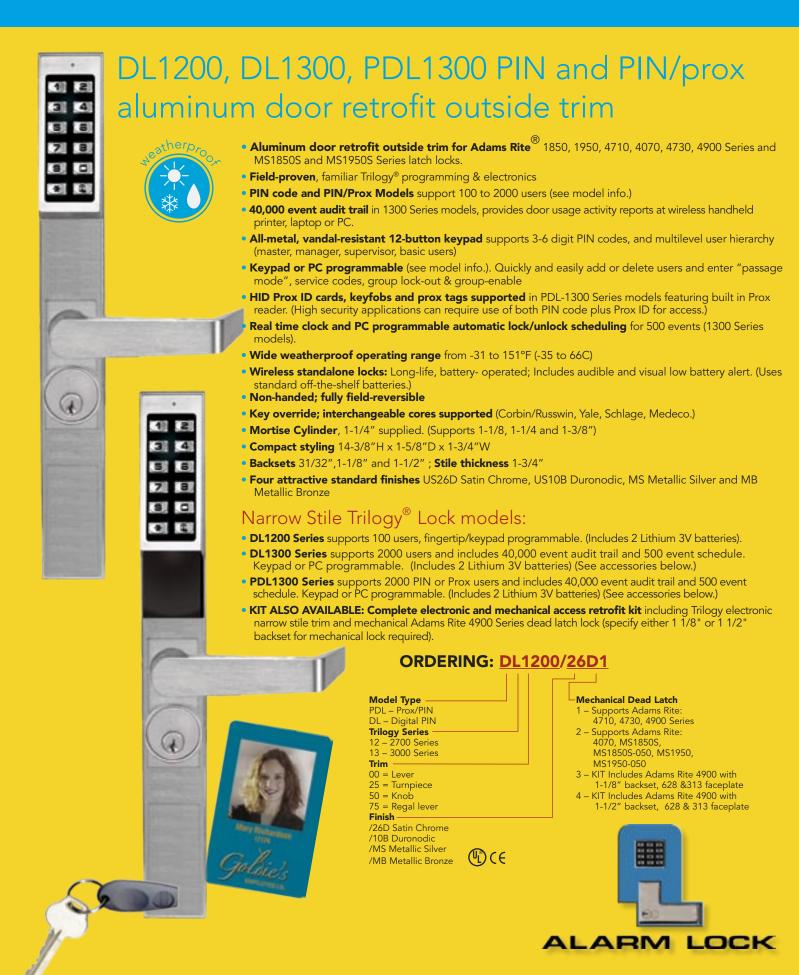

## Trilogy audit trail lock accessories for 1300 Series

progr softw lock. AL-PCI Window used to schedule

**AL-DTMII Data Transfer Module** used to transfer program data from the PC (running DL-WINDOWS software) to the lock and receives audit trail from the lock. Can store data for up to 96 locks at a time.

**AL-PCI2 Trilogy PC Software Kit** Windows-format software kit used to program Trilogy lock, codes, schedules, view audit trail reports. Kit includes DL-WINDOWS software

and (required) computer interface cable for use on serial port. Note: Requires DL-WINDOWS Software version 3.04 or higher.

**AL-PCI2-USB**, As above, but with interface cable for USB port.

**DL-WINDOWS** Upgrade for Trilogy software version (software only). (Contained in two items above.)

AL-PRE: Prox Card Reader/Enroller Enables instant, automatic enrollment of Prox cards, keyfobs, tags into DL-Windows (Simply present the prox Card/fob device to the unit's faceplate to enroll—no need to be in the presence of the lock while enrolling—eliminates the need for keyboarding each badge's number).

Supports all Prox cards, keyfobs and tags. Simultaneous card enrollment, downloading or uploading – all on just one serial port. 9V Battery operation.

**AL-IR1 Infrared Printer** (right) Prints the event log and user code with wireless hand-held convenience (battery operated).



There's a Trilogy keyless access lock for every requirement and application

MODEL:	DL12/1300	DL2700	DL2800	DL3000	DL4100	DL3500	DL4500	ETDL	DK3000
Lock Type	Narrow stile	Cylindrical	Cylindrical	Cylindrical	Cylindrical	Mortise	Mortise	For Panic Trim	Keypad
Prox Reader model	PDL1300			PDL3000	PDL4100	PDL3500	PDL4500	ETPDL	PDK3000
Users	100 - 2000	17	200	DL3000 300; PDL3000 2000	2000	DL3500 300; PDL3500 2000	2000	2000	2000
Audit Trail	0 - 40000		1000	1600; 40000 (PDL)	40000	40000	40000	40000	40000
Schedules	0 - 500		150	150; 500 (PDL)	500	500	500	500	500
Privacy function					Yes		Yes		
Classroom/ Deadbolt						CR or DB	DB		
Weather proof -31 to 151°F	Standard	WP version	Standard	WP version	Standard	Standard	Standard	Standard	Standard
Handing	Non	Non	Non	Non	Non	Field Reversible	Field Reversible	Non	
Std. Door Thickness	1-3/4"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	1-5/8 to 1-7/8"	
Std. Backset	31/32", 1-1/8" 1-1/2"	2-3/4"	2-3/4"	2-3/4"	2-3/4"	2-3/4"	2-3/4"		
Cylinder or IC Prep	mortise, incdd	key in knob or 9 ICs	key in knob or 9 ICs	key in knob or 9 ICs	key in knob or 9 ICs	mortise, incdd	mortise, incdd	rim cyl., incdd	
Finishes (US)	26D, 10B, MS, MB	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26, 26D, 3, 5, 10B	26/D, 3, 5, 10B, MS, MB

345 Bayview Ave, Amityville, New York 11701 1-800-ALA-LOCK Fax 631-789-3383 www.alarmlock.com

